

Additional Handset for LA-90


Contents of package

Please check if the following items are included:

- 1 black inlay strip
- 1 handset
- 1 coiled lead RJ to 3,5 mm jack



LA-90 with black inlay strip

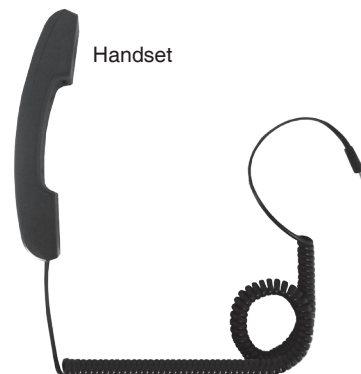

Coiled lead RJ / 3,5 mm jack

Setup

LA90 Inset Panel

Replace existing coloured panel by pulling firmly at the top of the LA90 on the old panel to remove it. Insert the new black panel in its place with the nib at the top.

Handset

Plug the transparent RJ-contractor of the coiled lead into the socket of the handset. Plug the 3.5 mm jack plug of the coiled lead into the headset port of the LA90.

The handset can then be placed onto the nib of the black inset panel

If using the internal microphone rather than an external desktop microphone with the LA90 you may have to reduce the output of the handset with the headset volume control to avoid feedback (whistling)

Operation

Press the «I»-button to switch the LA90 on. To switch the LA90 off, press «O».

Adjust the handset volume with the headset volume control above the headphone connector.

See LA90 instructions for full operational instructions.

